Model E71 Series

Above-Ground Swimming Pool Pump

The final word on above-ground pump design. Dual discharge ports allow for easy conversion from cartridge to sand, while an oversized in-ground style basket allows for minimal maintenance.


Features

- This high performance, medium head pump comes complete with an industry standard 200 seal for convenient replacement.
- Switch effortlessly from sand to cartridge with our patented dual discharge ports.
- Suction and discharge ports are equipped with hose adaptors and 1.5" NPT. (Also available with 1.5" Slip quick disconnect unions)
- Specially constructed clear lid with ring lock design is easy to open. Large keyed strainer basket is always locked in place.
- Pump is equipped with durable, 48 frame TEFC motor on most models.
- Pump has a standard 3 ft. 3/12 AWG cord set pre-mounted. A variety of other cord sets are available.
- Every pump is performance tested before leaving the Speck factory.

Features Specific to the 1.1 THP Dual Voltage Motor

- Pump is equipped with a 1.1 THP (48 frame thru-bolt mount) Variable Speed Motor.
- Motor runs on a wide voltage range 100-130/200-250V (without switching).
- Built-In Controller, LED Screen & Keypad can be locked for safety.
- 3 Adjustable Power Levels Levels can be set to range from 50 Watts/1000 RPM to 1000 Watts/3500 RPM (in increments of 10 Watts).
- Programmable high efficiency TEFC (totally enclosed fan cooled) maintenance free permanent magnet brushless 48 frame motor.

Dimensional Drawing

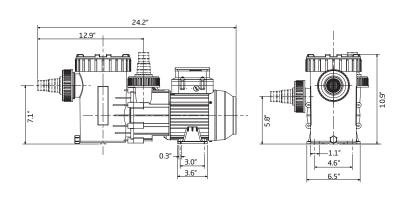









Trademarks and Certifications



Select E71 models are ENERGY STAR certified

Performance Curves





8125 Bayberry Road, Jacksonville, Florida 32256 USA | Phone: (904) 739-2626 | Fax: (904) 737-5261 Website: www.speck-pumps.com

SPECK 🗶