

# Normblock Multi Series

# SPECK

All Polyurethane Pump 1750 RPM  
(7.5, 10, 15, 20, 25 & 30 HP)

Redefining the limits of plastic pumps. The Normblock Multi takes the non-corrosive and lightweight benefits of plastic higher than any other American manufacturer.

## Features

- This pump has a robust horizontal single stage design.
- Superior slow (1750 rpm) running design reduces vibrations resulting in quiet operation.
- The housing is made of high performance plastic (THK), corrosion resistant without elaborate internal coating and can be used with higher salt concentrations.
- Heavy duty energy efficient totally enclosed fan cooled (TEFC) motor, Class F insulation, protection class IP 55. Sealed ball bearings need no lubrication.
- Shaft coupling allows motor to be replaced without replacing mechanical seal.
- A high wear, rugged Carbon/SiC - EPDM mechanical seal allows for a long life and long maintenance intervals. Special application seals available upon request.
- Equipped with stainless steel shaft extension.
- Optional all plastic strainer tank for horizontal flooded suction applications.
- Every pump is tested to factory & customer's specifications.

Please Note: The noise level from both the motor and pump are greatly influenced by how they are installed. Consideration should be given to minimize vibration and noise transmission.




Normblock Multi 125/250

## Trademarks and Certifications



## Performance Curves

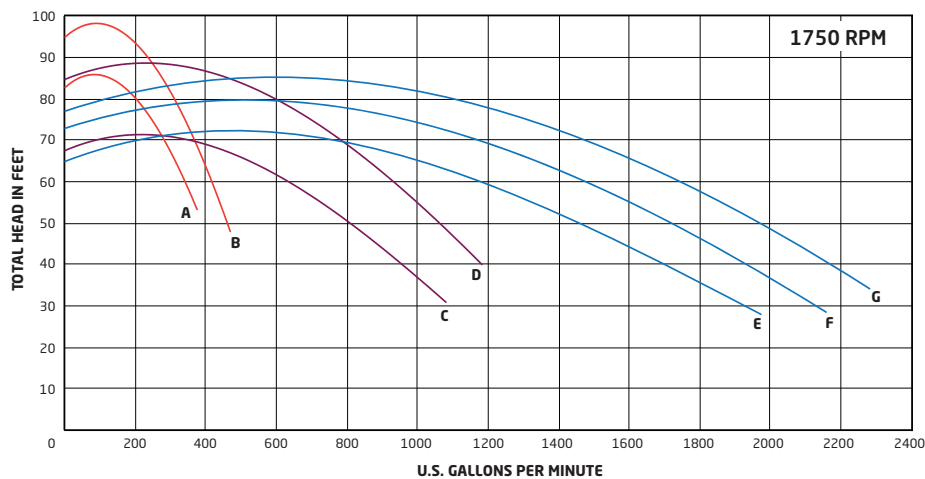

**A. Normblock Multi 65/250** (Ø 225mm) - 7.5 HP S.F. 1.25

**B. Normblock Multi 65/250** (Ø 240mm) - 10.0 HP S.F. 1.25

**C. Normblock Multi 100/250** (Ø 220mm) - 15.0 HP S.F. 1.25

**D. Normblock Multi 100/250** (Ø 240mm) - 20.0 HP S.F. 1.25

**E. Normblock Multi 125/250** (Ø 235mm) - 20.0 HP S.F. 1.25

**F. Normblock Multi 125/250** (Ø 245mm) - 25.0 HP S.F. 1.15

**G. Normblock Multi 125/250** (Ø 255mm) - 30.0 HP S.F. 1.15